





DINNÉES TECHNIQUES

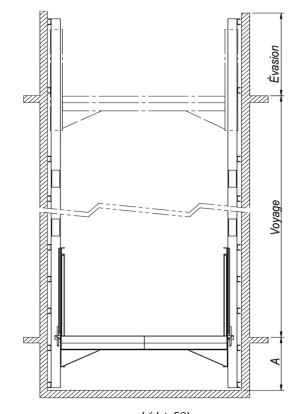

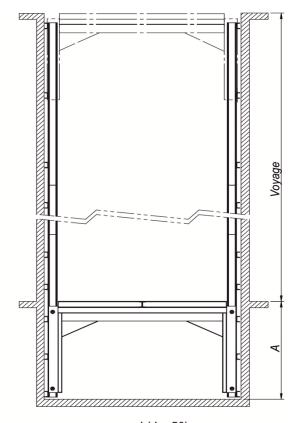





PRH-2-I

PRH-2

CHARGE	(G) LARGEUR	(I) FOND	A (mm)		F
(KG)	(mm)	(mm)	PRH-2	PRH-2-I	(mm)
1.500	2.000	3.000	550	1.600	180
2.000	2.500	5.000	550	1.600	205
3.000	2.500	5.000	600	1.800	230
4.000	2.500	5.000	650	2.300	255
5.000	2.500	5.000	650	2.300	280

Lorsque le niveau (G) est supérieur à 2.700 mm, il faudra les câbles de compensation. La tranchée 750 mm

POUR D'AUTRES CONSEILS EN MESURES OU CARACTÉRISTIQUES