

STAIRLIFT PLATFORM HDP-V

R06

 OFFER

 ORDER

Offer No.

Order No.

Valued by

Customer Data

Offer Data

Customer <input type="text"/>	Tel. <input type="text"/>	Ref. <input type="text"/>
Contact person <input type="text"/>	Cell. <input type="text"/>	Date <input type="text"/>
E-Mail <input type="text"/>	Fax <input type="text"/>	Delivery date <input type="text"/>

General Characteristics

Load <input type="checkbox"/> 225 kg	Speed <input type="checkbox"/> 0.1 m/s	Boarding <input type="checkbox"/> 90° <input type="checkbox"/> 180°	<input type="checkbox"/> Three-Phase 230 V
Travel <input type="text"/> mm (Max. travel 1800 mm)	Pit <input type="text"/> mm	<input type="checkbox"/> Three-Phase 400 V	<input type="checkbox"/> Single-Phase 230 V
Platform dimensions <input type="text"/> A x <input type="text"/> B mm (standard 1000 x 760 mm) (see page 2)	Scape <input type="text"/> mm	<input type="checkbox"/> Other <input type="text"/>	<input type="checkbox"/> Voltage <input type="text"/>

Options

Keys (number and position must be indicated) <input type="checkbox"/> Yes <input type="checkbox"/> No	Floor door <input type="checkbox"/> Yes <input type="checkbox"/> No (especificar mano en observ. y hoja de planos)	No standard RAL <input type="checkbox"/> Yes <input type="text"/> <input type="checkbox"/> No (RAL 7035 and RAL 9005 combined)
Automatized arms <input type="checkbox"/> Yes <input type="checkbox"/> No	Automatized basis <input type="checkbox"/> Yes <input type="checkbox"/> No	Remote control <input type="checkbox"/> Calling <input type="checkbox"/> Calling and folding <input type="checkbox"/> No
Prepared for outdoor <input type="checkbox"/> Yes <input type="checkbox"/> No	Foldig seat <input type="checkbox"/> Yes <input type="checkbox"/> No	Hydraulic group-platform distance <input type="checkbox"/> Standard (3 m) <input type="checkbox"/> Other <input type="text"/> m
Pillar for landing call buttons <input type="checkbox"/> Painted <input type="checkbox"/> Stainless steel <input type="checkbox"/> No	Standard equipment	Automatic reniveling - Safety plate - Stop - Emergency dispositive to avoid the electric supply cut in descent - Fix protection in the rail zone - Manual arms - Manual folding platform - Closet for the hydraulic group and the electric panel with special key to open - Control funtion at current to 24 V

Observations


(all data will be erased!)

page 2 must be filled

Planos



Boarding type Type 1 Type 2 Type 3 Type 4

(indicate boarding type and dimensions having into account that the ramp is always the lowest floor boarding)

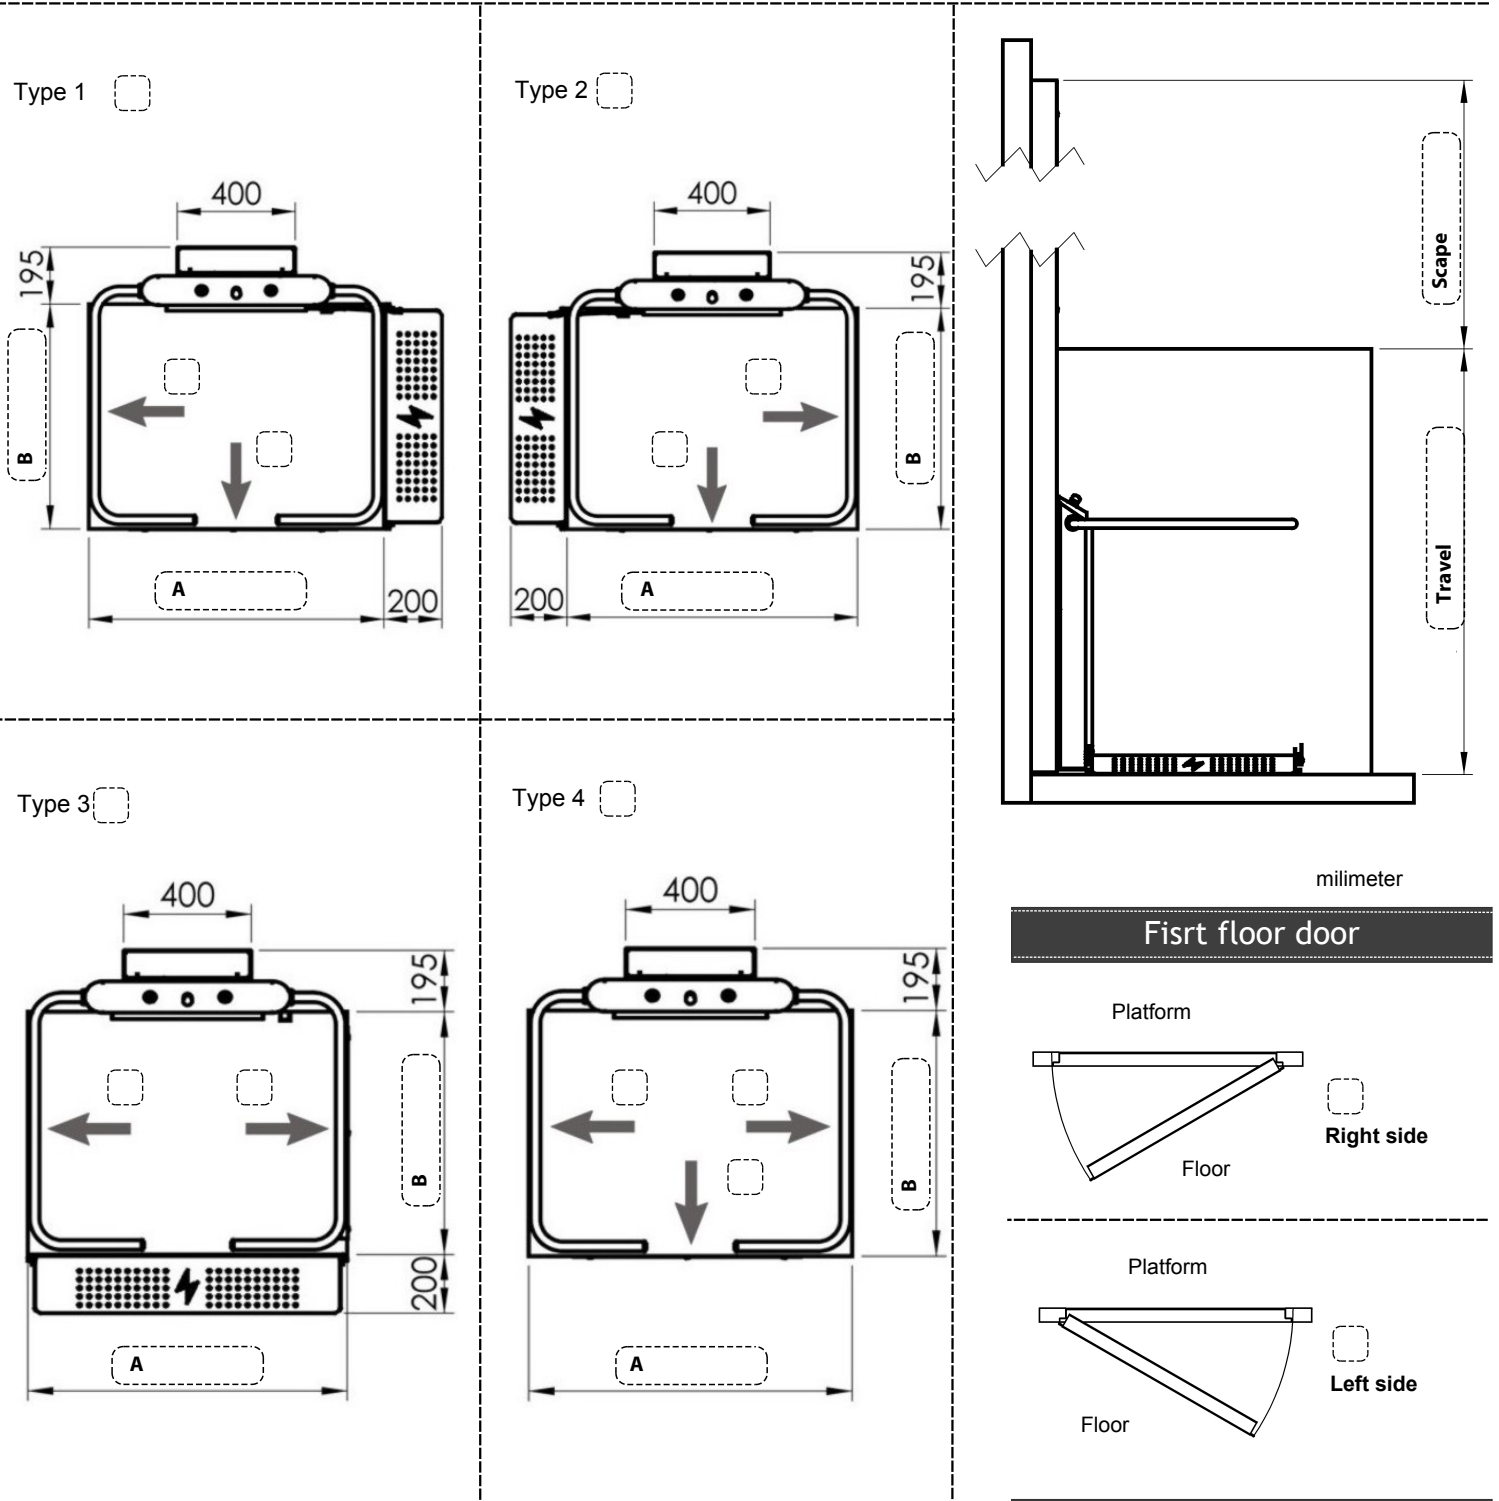

milimeter

Fisrt floor door

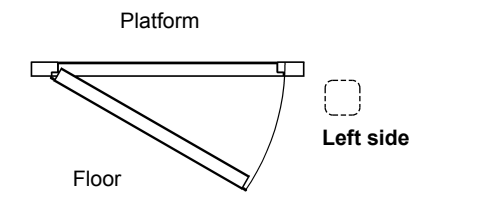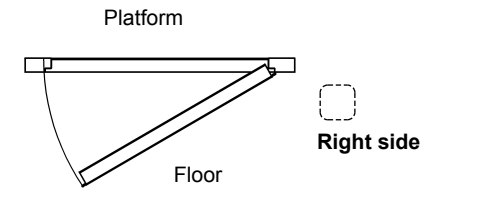

Value

Total Price €

Taxes and transport not included

Telf. 952 17 80 92 Fax. 952 17 90 69